



CoA 122 100mm KERB & 150mm WATERTABLE (GREENING PROJECTS ONLY)
SCALE 1:10 @ A3

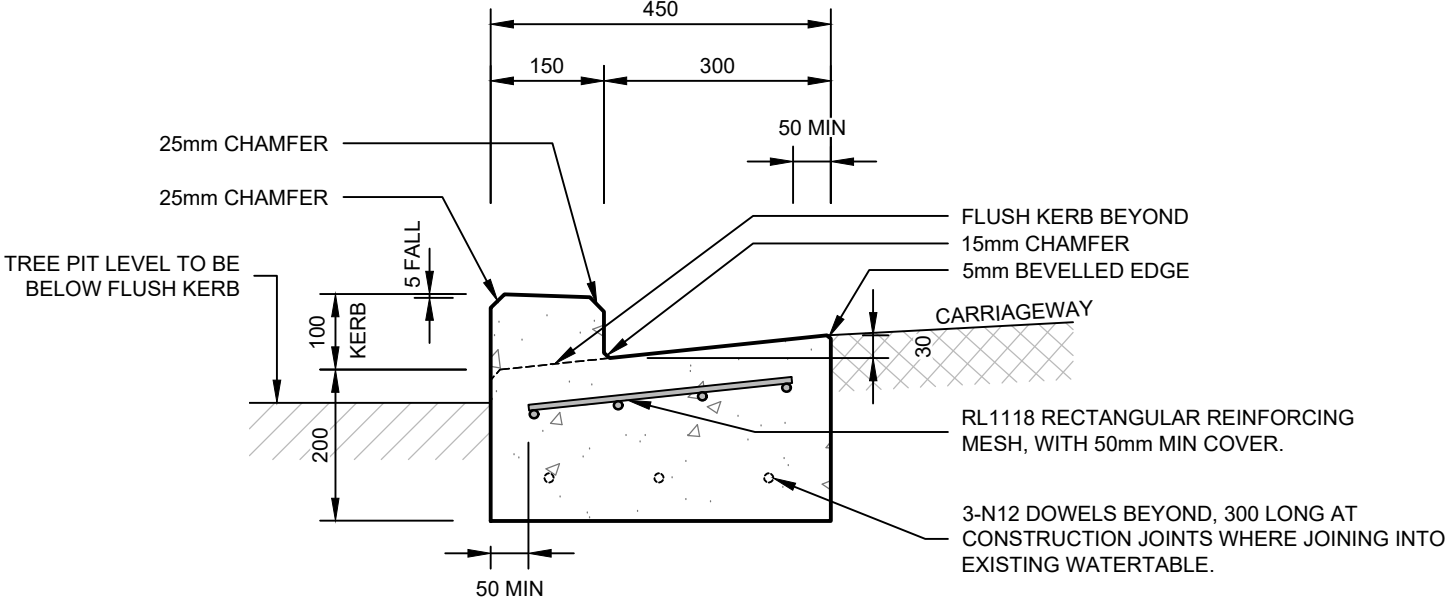

CoA 123 100mm KERB & 300mm WATERTABLE (GREENING PROJECTS ONLY)
SCALE 1:10 @ A3

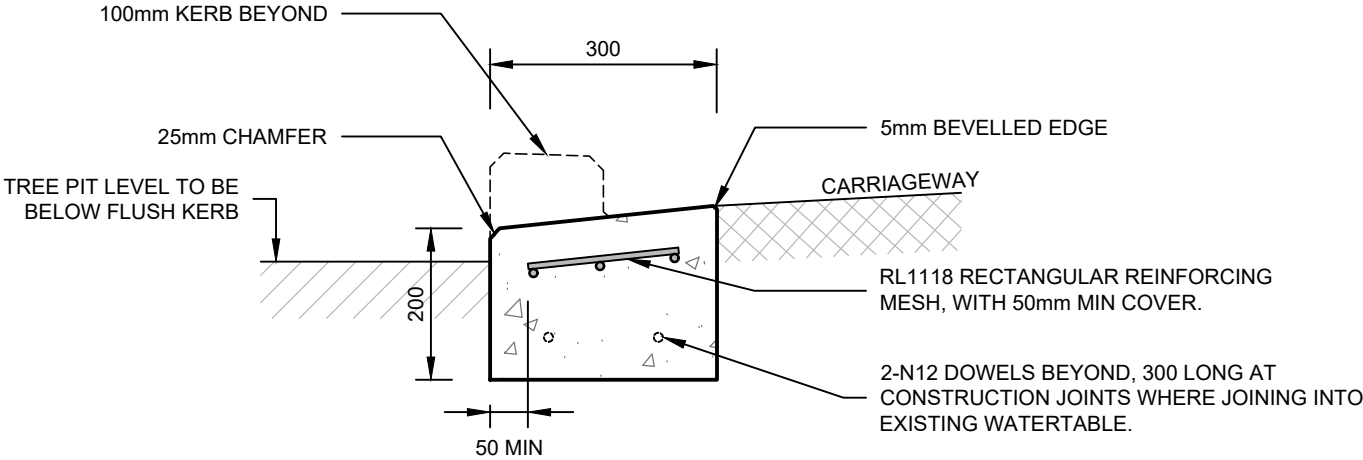

CoA 124 300mm FLUSH KERB (GREENING PROJECTS ONLY)
SCALE 1:10 @ A3

GENERAL NOTES:

1. THESE KERB PROFILES ARE TO BE USED IN GREENING PROJECTS ONLY.
2. THIS KERB PROFILE SHALL BE USED FOR ROAD GARDEN BED PROTUBERANCES.
3. THIS KERB PROFILE SHALL NOT BE USED AS THE MAIN STORMWATER CHANNEL.
4. ALL CONCRETE KERBING MUST BE CONSTRUCTED IN ACCORDANCE WITH AS 2876, UNLESS NOTED OTHERWISE.
5. SHRINKAGE CONTROL JOINTS SHALL BE CONSTRUCTED IN ACCORDANCE WITH AS2876 AT SPACINGS OF 2.5m - 3.0m.
6. CONCRETE STRENGTH TO BE 32MPa UNLESS NOTED OTHERWISE.
7. BACK OF KERB TO BE LIGHT SPONGE FINISHED SMOOTH, TO A LEVEL 50mm BELOW FINISHED GARDEN LEVEL.
8. FOR INSTALLATION REQUIREMENTS REFER TO CoA 900 / CoA 901.
9. ALL CONCRETE TO BE WATER CURED CONTINUOUSLY FOR 3 DAYS OR ALTERNATIVELY COATED WITH AN APPROVED CURING COMPOUND.
10. COLOUR OF KERB TO MATCH ADJACENT KERB (STANDARD GREY, BRIGHTON LITE OR CHARCOAL GREY).

REV	DESCRIPTION	DATE	<div>CONSTRUCTION STANDARD</div> <div>CONCRETE KERBS</div> <div>KERBS FOR GREENING PROJECTS ONLY</div>		<div><div></div><div>CITY OF ADELAIDE</div></div> <div><div>SHEET NUMBER</div><div>CK008</div></div> <div><div>REVISION</div><div>B</div></div>
A	ORIGINAL ISSUE	03/23			
B	5mm BEVELLED EDGE	03/23			