


CoA 185 **MEDIAN KERB**
SCALE 1:10 @ A3

NOTES:

- MEDIAN KERB SHALL BE LAID IN 100mm PM1/20QG COMPACTED TO 98% MMDD.
- MEDIAN KERB SHALL HAVE STEEL TROWEL FINISH.
- MEDIAN KERB SHALL BE PAINTED WHITE AS PER "D.I.T. PAVEMENT MARKING MANUAL".
- CONCRETE STRENGTH TO BE 32MPa UNLESS NOTED OTHERWISE.
- ALL CONCRETE TO BE WATER CURED CONTINUOUSLY FOR 3 DAYS OR ALTERNATIVELY COATED WITH AN APPROVED CURING COMPOUND.
- COLOUR OF KERB TO MATCH ADJACENT KERB (STANDARD GREY, BRIGHTON LITE OR CHARCOAL GREY).

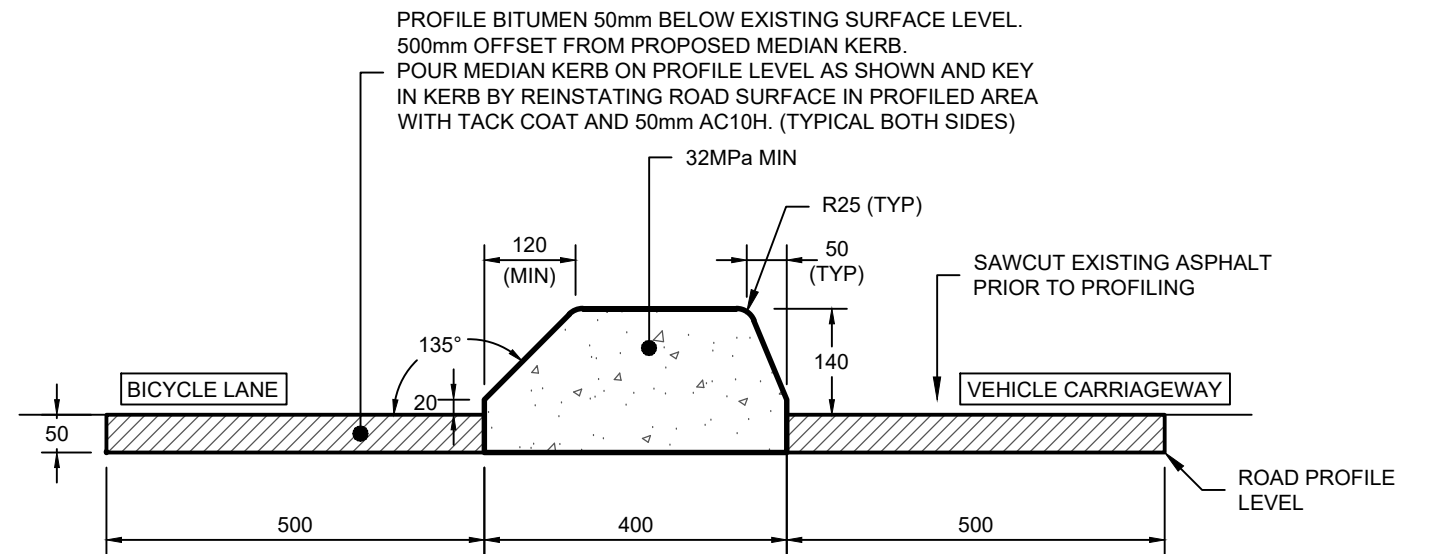

CoA 186 **MEDIAN KERB - BICYCLE LANE SEPARATOR**
SCALE 1:10 @ A3

NOTES:

- MEDIAN KERB SHALL BE LAID IN 100mm PM1/20QG COMPACTED TO 98% MMDD.
- MEDIAN KERB SHALL HAVE STEEL TROWEL FINISH.
- MEDIAN KERB SHALL BE PAINTED WHITE AS PER "D.I.T. PAVEMENT MARKING MANUAL".
- CONCRETE STRENGTH TO BE 32MPa UNLESS NOTED OTHERWISE.
- ALL CONCRETE TO BE WATER CURED CONTINUOUSLY FOR 3 DAYS OR ALTERNATIVELY COATED WITH AN APPROVED CURING COMPOUND.
- CYCLE LANE EFFECTIVE WIDTH TO BE MEASURED FROM A 200mm OFFSET FROM THE SEPARATOR KERB.
- COLOUR OF KERB TO MATCH ADJACENT KERB (STANDARD GREY, BRIGHTON LITE OR CHARCOAL GREY).

REV	DESCRIPTION	DATE	CONSTRUCTION STANDARD CONCRETE KERBS MEDIAN KERBS	 CITY OF ADELAIDE
A	ORIGINAL ISSUE	03/23		
			SHEET NUMBER CK085	REVISION A