




**CoA 408** **PARK LANDS ASPHALT FOOTPATH DETAIL**  
SCALE 1:10 @ A3

NOTES:


- 1. FOR HARDWOOD TIMBER EDGE DETAIL, REFER TO CoA 412
- 2. WHERE "RED OXIDE" OR "OXIDE" COLOURED ASPHALT IS SPECIFIED, THE ASPHALT MIX SHALL BE MADE UP BY SUBSTITUTING 2% (BY WEIGHT) OF THE FINE SAND IN THE STANDARD AC7 MIX WITH ABILOX LIGHT RED 109 OXIDE POWDER, OR APPROVED EQUIVALENT (MEXPHLATE C IS NOT REQUIRED AS A BINDER SUBSTITUTE)

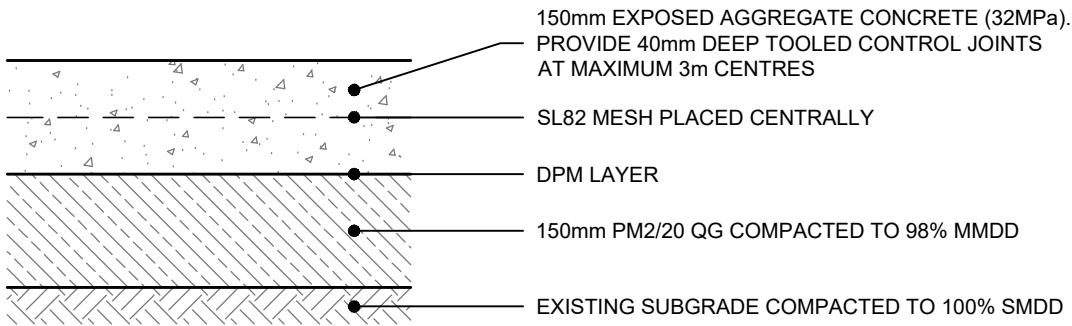

**CoA 409** **PARK LANDS EXPOSED AGGREGATE CONCRETE DETAIL**  
SCALE 1:10 @ A3

NOTES:

- 1. FOR SPECIFIC CONCRETE MIX DETAILS, CONTACT CoA
- 2. PROVIDE LIGHT WASHED EXPOSED AGGREGATE FINISH TO TOP SURFACE
- 3. REPLACE ENTIRE SECTION OF CONCRETE TO EXISTING JOINTS

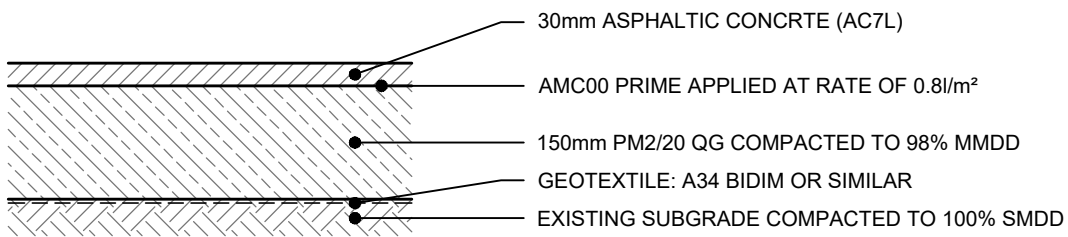

**CoA 410** **TYPICAL ASPHALT FOOTPATH DETAIL**  
SCALE 1:10 @ A3

NOTES:

- 1. FOR HARDWOOD TIMBER EDGE DETAIL, REFER TO CoA 412
- 2. WHERE "RED OXIDE" OR "OXIDE" COLOURED ASPHALT IS SPECIFIED, THE ASPHALT MIX SHALL BE MADE UP BY SUBSTITUTING 2% (BY WEIGHT) OF THE FINE SAND IN THE STANDARD AC7 MIX WITH ABILOX LIGHT RED 109 OXIDE POWDER, OR APPROVED EQUIVALENT (MEXPHLATE C IS NOT REQUIRED AS A BINDER SUBSTITUTE)

GENERAL NOTES:

- 1. MATERIALS PROVIDED AND PAVEMENTS CONSTRUCTED IN ACCORDANCE WITH D.I.T. SPECIFICATIONS UNLESS OTHERWISE NOTED
- 2. EXCLUDE LOADING CATEGORIES REFERENCE FROM CoA 420 - FOOTPATHS LOADING MAP

REV	DESCRIPTION	DATE	<div>CONSTRUCTION STANDARD</div> <div>PAVEMENT</div> <div>FOOTPATH DETAILS</div> <div>FOR GENERAL MAINTENANCE / MINOR REINSTATEMENT</div>		<div><div></div><div>CITY OF ADELAIDE</div></div> <div><div>STANDARD NUMBER</div><div>PV003</div></div> <div><div>REVISION</div><div>A</div></div>
A	ORIGINAL ISSUE	09/22			