




CoA 970 **FLAGSTONE PAVING DETAIL AROUND CIRCULAR OBJECTS**
NTS

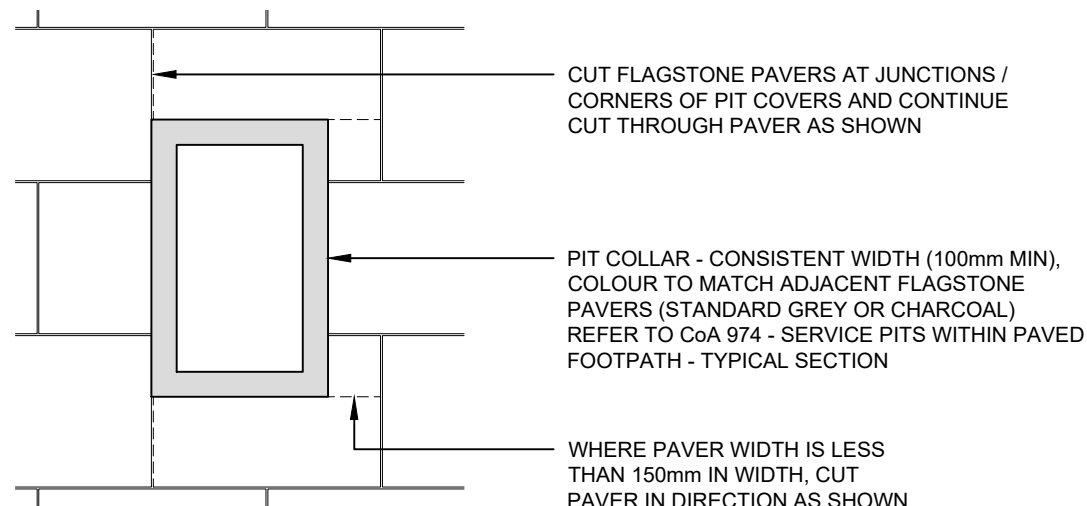


CoA 971 **FLAGSTONE PAVING DETAIL AROUND SERVICE PITS**
NTS

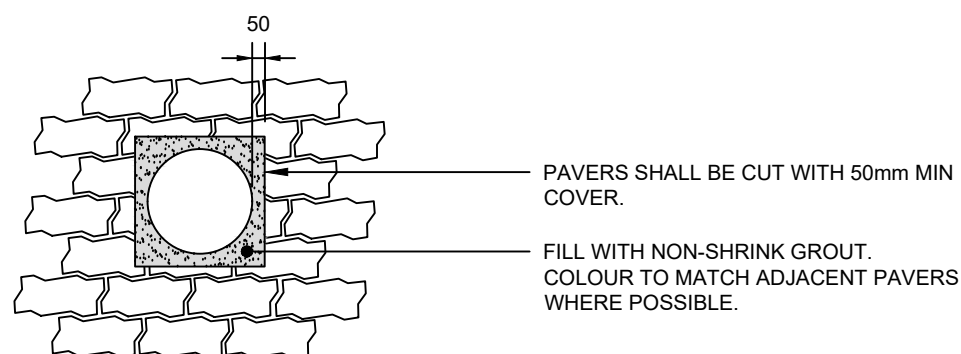

CoA 972 **INTERLOCKING PAVING DETAIL AROUND CIRCULAR OBJECTS**
NTS

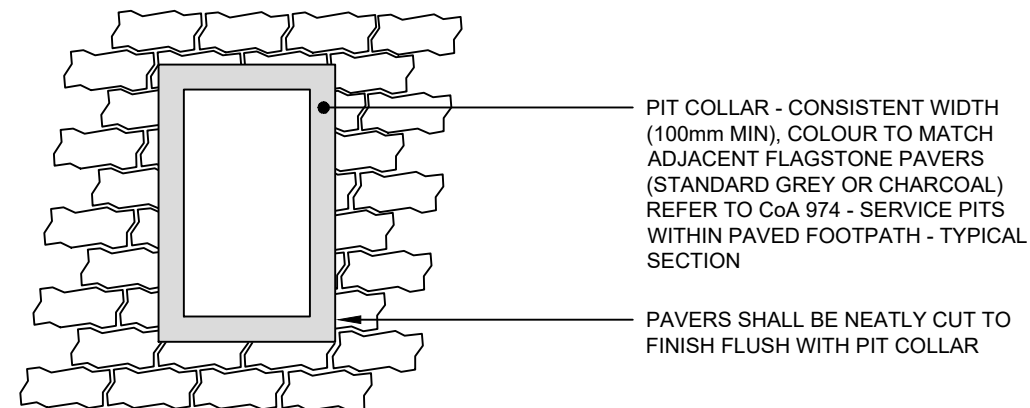

CoA 973 **INTERLOCKING PAVING DETAIL AROUND SERVICE PITS**
NTS

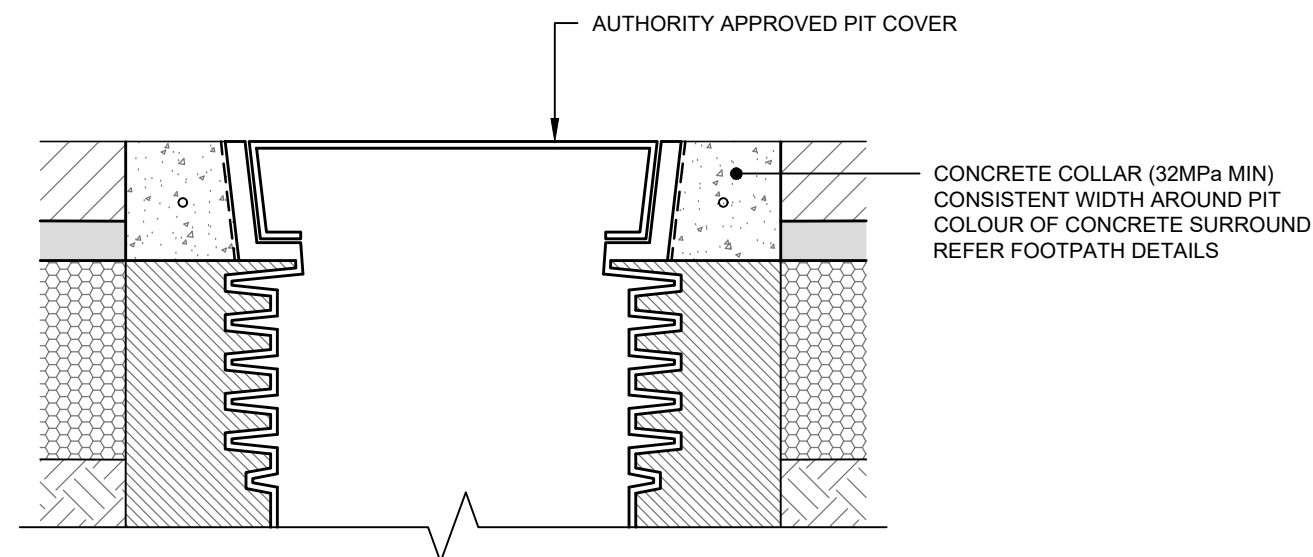


CoA 974 **SERVICE PITS WITHIN PAVED FOOTPATH - TYPICAL SECTION**
NTS

CoA 974 NOTES:

1. REFER TO SERVICE AUTHORITY REQUIREMENTS AND APPROVED PIT AND COVER SUPPLIERS
2. NOT TO BE USED FOR VEHICULAR RATED PAVEMENTS AND DRIVEWAY CROSSOVERS
3. PIT AND COLLAR TO BE FLUSH WITH ADJACENT PAVEMENT LEVELS, WITH CROSS-FALL MATCHING GRADE OF FOOTPATH
4. CONCRETE COLLAR NOT REQUIRED FOR ASPHALT FOOTPATHS

GENERAL NOTES:

1. ALL NEW PITS TO BE INSTALLED PERPENDICULAR OR PARALLEL TO THE KERB LINE.
2. PAVEMENTS TO BE CONSTRUCTED IN ACCORDANCE WITH DIT GENERAL CONSTRUCTION FOR PAVEMENTS.
3. MATERIALS TO BE PROVIDED IN ACCORDANCE WITH DIT SPECIFICATIONS.
4. ACCESS COVERS AND GRATES SHALL BE COMPLIANT WITH AS3996 UNLESS OTHERWISE NOTED.
5. PIT COLLAR SHALL MATCH WITH THE LOADING CATEGORY OF THE PIT COVER. FOR HEAVY DUTY AND LARGE PIT COVERS (OVER 1000x800mm) APPROPRIATE REINFORCEMENT SHALL BE USED TO CONSTRUCT PIT COLLARS.

REV	DESCRIPTION	DATE	CONSTRUCTION STANDARD TYPICAL INSTALLATIONS PAVING AROUND SERVICE PITS & PIT INSTALLATION		 CITY OF ADELAIDE
A	ORIGINAL ISSUE	03/23			
			SHEET NUMBER		REVISION
			T1060		A